

Concord

SLI




BESTSELLERLIST

Control Spot


- High output for 70w and 150w CMI-T (G12) lamps
- Lightweight electronic gear
- Reflectors provide beam options from 15°-40°
order separately
- Order lamp separately



Control Spot

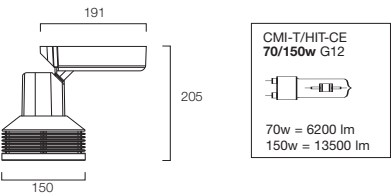

Housing + Reflector



Housing		White	Silver
70w CMI-T	Single Circuit	2036063	2036066
70w CMI-T	Three Circuit	2036064	2036067
150w CMI-T	Single Circuit	2036073	2036076
150w CMI-T	Three Circuit	2036074	2036077

Reflectors Order in addition to Housing

	Beam	White	Silver
Spot	15°	2016288	2027502
Flood	40°	2016290	2027503




Torus 35FX & 70FX

- Extremely light and compact spotlight
- CMI-T ceramic metal halide capsule lamp
- 35w output 50% more than 100w tungsten halogen
- 70w output 300% more than 100w tungsten halogen capsule lamp
- Lightweight electronic control gear, with timed ignition and thermal cut-out
- Flicker-free operation
- Lamp focusing facility and lockable head
- **Order lamp separately**




Torus 35FX

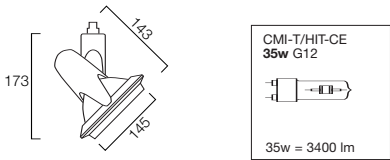

11° Spot		White	Silver
35w CMI-T	Single Circuit	2035032	2035035
35w CMI-T	Three Circuit	2035033	2035036

28° Flood		White	Silver
35w CMI-T	Single Circuit	2035042	2035045
35w CMI-T	Three Circuit	2035043	2035046

Torus 70FX

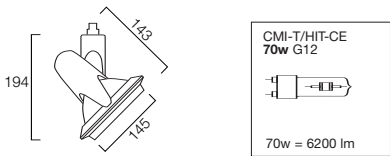

12° Spot		White	Silver
70w CMI-T	Single Circuit	2036370	2036373
70w CMI-T	Three Circuit	2036371	2036374

29° Flood		White	Silver
70w CMI-T	Single Circuit	2036380	2036383
70w CMI-T	Three Circuit	2036381	2036384

Torus 100FX


- Extremely light and super-compact spotlight
- 50-100w tungsten halogen axial filament capsule lamp
- Integral electronic transformer doubles average lamp life
- Individually dimmable using on-board dimmer
- Collectively dimmable using trailing and leading edge dimming system
- Lamp focusing facility and lockable head
- Supplied with Sylvania 100w axial filament lamp




FX Accessories

- Interchangeable safety lenses, wattages and 100FX reflectors provide beam options from 12-29°
- Elongation safety lens for highlighting sculptures, mannequins, logos and shelving
- Coloured filters and gel filter holder for creating dramatic effects and highlighting displays
- Honeycomb filter, screw-fit glare shield and barn door accessories for effective glare control
- A combination of accessories can be fitted but must always include a safety lens next to the lamp



Gel Filter Holder



Glare Shield



Torus 100FX



8-12° Spot		White	Silver
100w QT12-LPax	Single Circuit	2031863	2031867
100w QT12-LPax	Three Circuit	2031864	2031868

34° Flood		White	Silver
100w QT12-LPax	Single Circuit	2031876	2031881
100w QT12-LPax	Three Circuit	2031877	2031882

Accessories Order Separately

Flood Lens	34°	2027234
Wide Flood Lens	58°	2032480
Elongation Lens	5 : 1	2027239
Wide Reflector		2020178
Narrow Reflector		2020177
Honeycomb Filter		2027240
UV Filter		2027241
Gel Filter Holder Silver	Holds UV Filter	2032468
Glare Shield Silver	Reduces peripheral glare	2032462

Safety Lens (Honeycomb must be fitted at the front of the holder).

Can be used in combination with other filters. Must be at front.

Other accessories available. Please refer to main catalogue

Torus AR111

- Extremely light and compact spotlight for 100w AR111 low voltage reflector lamps
- Electronic transformer dimmable with leading and trailing edge dimmers
- 360° rotation and 90° tilt and lock features
- On-board dimmer reduces individual output to 20%
- **Order lamp separately**




Torus BriteSpot 111

- Extremely light and compact spotlight for the new metal halide 35w BriteSpot ES111 lamp from Sylvania
- Electronic control gear with timed ignition and thermal cut-out
- Integral glare control from patented glare cap
- **Order lamp separately**




Torus AR111



		White	Silver
100w AR111	Single Circuit	2037270	2037273
100w AR111	Three Circuit	2037271	2037274

Torus BriteSpot 111




		White	Silver
24° Spot			
35w BriteSpot ES111	Single Circuit	2037413	2037416
35w BriteSpot ES111	Three Circuit	2037414	2037417

Torus BriteSpot 50

- High output miniature spotlight
- New BriteSpot ES50 metal halide lamp
- Twice the output of 50w dichroic lamp
- Lockable adaptor and head
- Snap fit cowl accessory for reduction of peripheral glare
- Supplied with Sylvania 35w BriteSpot ES50 lamp



Torus BriteSpot 50

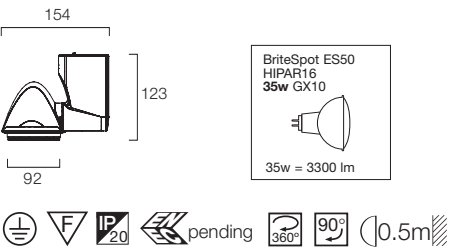

38° Flood		White	Silver
35w BriteSpot ES50	Single Circuit	2034990	2034994
35w BriteSpot ES50	Three Circuit	2034991	2034995

NOTE: Cannot be mounted on vertical surface or floor

Accessories Order Separately


Black Glare Shield	2028580
--------------------	---------

Torus 50FX

- Versatile super-slim lightweight spotlight
- 20-50w low voltage tungsten halogen capsule lamps
- Integral electronic transformer doubles average lamp life
- Collectively dimmable using trailing and leading edge dimming systems
- Lamp focusing facility and lockable head
- Order lamp separately
- Order Lens Assembly separately



Torus 50FX

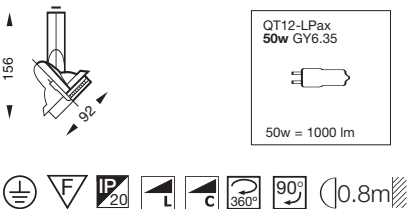

10° Spot		White	Silver
50w QT12-LPax	Single Circuit	2028550	2028555
50w QT12-LPax	Three Circuit	2028551	2028556

25° Flood		White	Silver
50w QT12-LPax	Single Circuit	2028565	2028570
50w QT12-LPax	Three Circuit	2028566	2028571

Accessories Order Separately

Flood Lens 25°	2030822
Wide Flood Lens 42°	2030821
Honeycomb Filter	2028586
UV Filter	2028584
Black Glare Shield	2028580


Other accessories available. Please refer to main catalogue

Torus 50

- Ultra slim compact electronic spotlight – 150mm depth
- 20-50w dichroic lamps, easy lamp change
- Integral electronic transformer doubles average lamp life
- Collectively dimmable using trailing and leading edge dimming systems
- Aluminium lamps such as Sylvania Coolfit can significantly reduce backlight
- Order lamp separately



Torus 50



Superia 50
20/35/50w GU5.3



20w = 320 lm
35w = 630 lm
50w = 1000 lm



10° Spot/38° Flood		White	Silver
50w Superia 50	Single Circuit	2025729	2025734
50w Superia 50	Three Circuit	2025730	2025735


Torus 35/70 Wallwasher

- High output wallwasher for even illumination of vertical surface
- 35w and 70w CMI-T G12 lamp options
- 35w 50% more output than 100w tungsten halogen and 5 times cooler
- 70w 300% more output than 100w tungsten halogen and 3 times cooler
- Order lamp separately




Torus 35/70 Wallwasher

35w



70w



CMI-T/HIT-CE
35/70w G12



35w = 3400 lm
70w = 6200 lm



35/70 Wallwasher		White	Silver
35w HIT-CE	Single Circuit	2034968	2034893
35w HIT-CE	Three Circuit	2034891	2034894
70w HIT-CE	Single Circuit	2034896	2034900
70w HIT-CE	Three Circuit	2034897	2034901


NOTE: Cannot be mounted on vertical surface

Torus 70FX Recessed

- 100mm recessing depth
- 70w ceramic metal halide capsule lamp
- Output 300% more than 100w tungsten halogen
- Electronic gearbox and housing pre-wired with universal plug for easy installation
- Lamp focusing facility and lockable head
- Adjustable 45° tilt and 360° rotation
- Range of filters, accessories and control lenses to customise displays or accent interiors



Torus 70FX Recessed

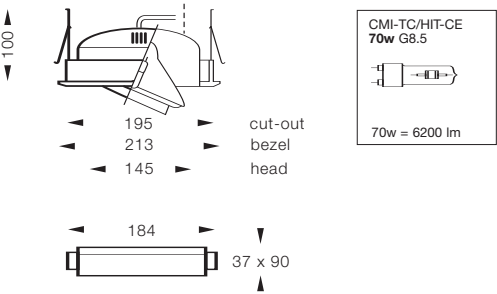

11° Spot	White
70w CMI-TC	2029090

39° Flood	White
70w CMI-TC	2029091

Accessories Order Separately

Flood Lens		2027234
Wide Flood Lens		2032480
Elongation Lens		2027239
Honeycomb Filter		2027240
UV Filter		2027241
Gel Filter Holder Silver	Holds UV Filter	2032468
Glare Shield Silver	Reduces peripheral glare	2032462

Safety Lens (Honeycomb must be fitted at the front of the holder).

Can be used in combination with other filters. Must be at front.


Other accessories available. Please refer to main catalogue

Torus 100FX Recessed

- 100mm recessing depth
- 50-100w tungsten halogen axial filament capsule lamp
- Electronic transformer dimmable using trailing and leading edge dimming systems
- Lamp focusing facility and lockable head
- Supplied with Sylvania 100w axial filament lamp



Torus 100FX Recessed

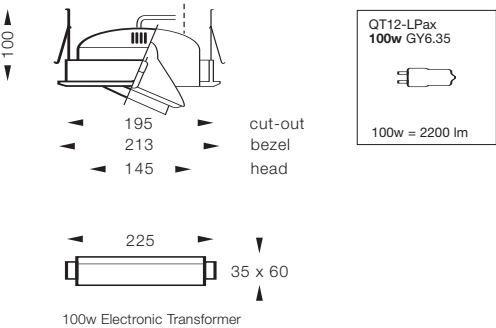

8-12° Spot	White
100w QT12-LPax	2032110

34° Flood	White
100w QT12-LPax	2032112

Accessories Order Separately

Flood Lens		2027234
Wide Flood Lens		2032480
Elongation Lens		2027239
Wide Reflector		2020178
Narrow Reflector		2020177
Honeycomb Filter		2027240
UV Filter		2027241
Gel Filter Holder Silver	Holds UV Filter	2032468
Glare Shield Silver	Reduces peripheral glare	2032462

Safety Lens (Honeycomb must be fitted at the front of the holder).

Can be used in combination with other filters. Must be at front.

Other accessories available. Please refer to main catalogue

Torus AR111 Recessed

- Extremely light and compact recessed spotlight for 100w AR111 low voltage reflector lamps
- Electronic transformer dimmable with leading and trailing edge dimmers
- 360° rotation and 90° tilt and lock features
- On-board dimmer reduces individual output to 20%
- Order lamp separately




Torus BriteSpot 111 Recessed

- Extremely light and compact recessed spotlight for the new metal halide 35w BriteSpot ES111 lamp from Sylvania
- Electronic control gear with timed ignition and thermal cut-out
- Integral glare control from patented glare cap
- Order lamp separately




Torus AR111 Recessed

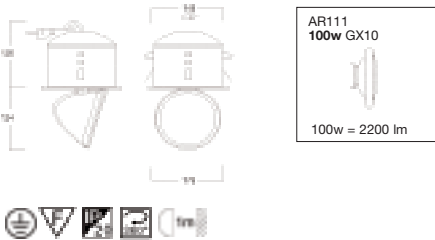

	White
100w AR111	2037426

Torus BriteSpot 111 Recessed

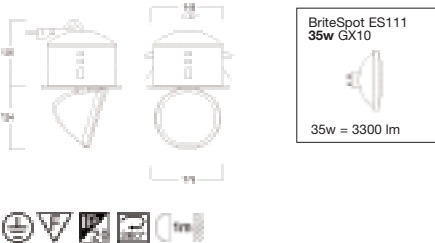


24° Spot	White
35w BriteSpot ES111	2037411

Torus 50FX Recessed

- Low voltage miniature adjustable downlight
- 25-50w low voltage tungsten halogen capsule lamps
- Square fronted single Quad
- Supplied complete with leading and trailing edge dimmable transformer
- Order lamp separately



Torus 50FX Recessed

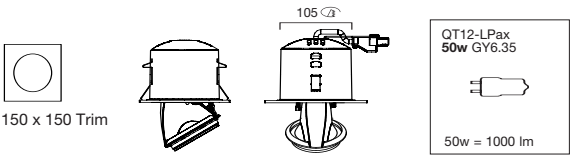

Recessed Quad	White	Silver
1 x 50w QT12-LPax	2034710	2034714

Safety Lens Assembly	Order in addition to Housing	
Flood Lens	25°	2030822
Wide Flood Lens	42°	2030821

Accessories	Order Separately	
Honeycomb Filter		2028586
UV Filter		2028584
Black Glare Shield		2028580


Other accessories available. Please refer to main catalogue

Lytespan 1

- ‘Trunk’ profile ideal for suspension or surface mount
- Track kits consisting of starter or joiner tracks with all components needed for single or continuous, surface mounted, straight runs
- Selection of universal suspensions



Lytespan 1 Single Circuit Track



Starter Track Kit

- Ideal for surface mounted runs
- Single length or to start a run
- **Supplied with Track Unit, Push-up Live Feed, End Caps and Surface Mount Clips**

Length	White
1m	2036010
2m	2036011
3m	2036012

Joiner Track Kit

- Ideal for surface mounted runs
- Extends Starter Track to create straight runs
- **Supplied with Track Unit, Plug-in Live Coupler and Surface Mount Clips**

Length	White	
2m	2036013	1.06kg
3m	2036014	1.58kg


		White
Push-up Live Feed	Universal	2011305
Plug-in Live Feed	Universal	2011348
Straight Plug-in Coupler	Mech/Elec	2011303
L Coupler	Mech/Elec	2011379
T Coupler	Mech/Elec	2011381
X Coupler	Mech/Elec	2011383
Flexible Coupler	Mech/Elec	2036027
End Cap	Must be used to safely terminate track ends	2011345

Universal Suspensions see page XX

Three Circuit Track


- Concord Lytespan 3 track features a polarisation channel running along one side of its entire length. (See opposite)
- All Lytespan 3 feeds and couplers except Live Ends are supplied pre-polarised, with wires for ease of installation
- Therefore when planning a scheme it is important that: The polarisation channel is continuous around corners and grids
- The layout shows the correct view from **above**

Three Circuit Track Planning Aid



Polarisation Channel

Planning from above

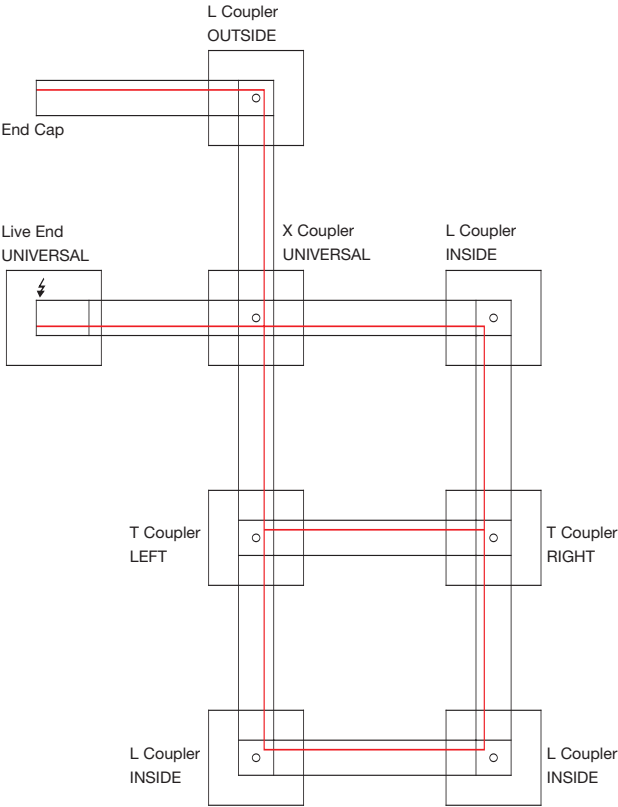


LED 150-TE

- Standard bezel, lightweight all metal construction with integral gear box
- Low glare faceted reflector
- 'Loop in' and 'loop out' plug and socket for easy installation
- Lampholders accept either Lynx-TE or Lynx-DE lamps
- Suitable for ceilings 1-30mm in thickness
- Integral HF electronic gear



LED 150-TE



Lynx-TE
13w GX24q-1
18w GX24q-2
26w GX24q-3


13w = 900 lm
18w = 1200 lm
26w = 1800 lm

Lynx-DE
13w GX24q-1
18w GX24q-2
26w GX24q-3

13w = 900 lm
18w = 1200 lm
26w = 1800 lm

160mmØ

1 x 18w Lynx-TE/Lynx-DE	2033880
1 x 26w Lynx-TE/Lynx-DE	2033884
2 x 13w Lynx-TE/Lynx-DE	2033888



Lynx-TE
18w GX24q-2
26/32w GX24q-3


18w = 1200 lm
26w = 1800 lm
32w = 2400 lm

Lynx-DE
18w G24q-2

18w = 1200 lm

185mmØ

1 x 32w Lynx-TE	2033893
2 x 18w Lynx-TE/Lynx-DE	2033897
2 x 26w Lynx-TE	2033902



Lynx-TE
32w GX24q-3
42w GX24q-4

32w = 2400 lm
42w = 3200 lm

Lynx-DE
26w GX24q-3


26w = 1800 lm

215mmØ


1 x 42w Lynx-TE	2033915
2 x 32w Lynx-TE/Lynx-DE	2033906
2 x 42w Lynx-TE	2033911

LED 150-TE

- Specular smooth reflector
- Standard bezel, lightweight all metal construction with integral gear box
- Even ceiling to wall illumination
- Ideal for reducing 'cavern effect'
- Integral HF electronic gear

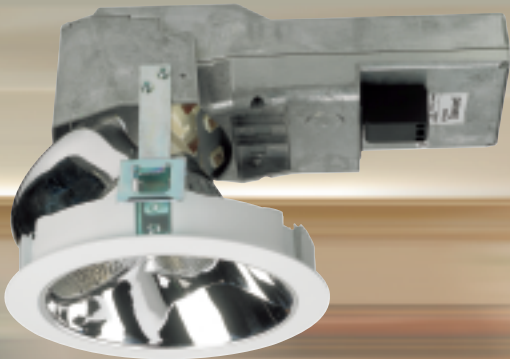


LED 150-TE Wallwasher

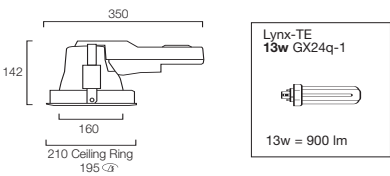


160mmØ Wallwasher

2 x 13w Lynx-TE **2033920**

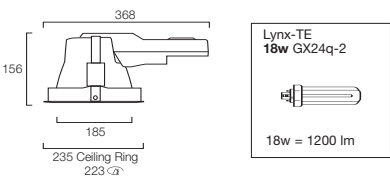

185mmØ Wallwasher

2 x 18w Lynx-TE **2033922**

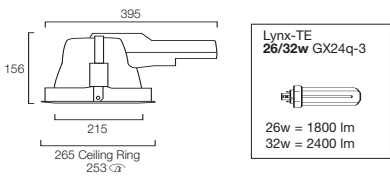

215mmØ Wallwasher

2 x 26/32w Lynx-TE **2033924**




Equinox III

- Choice of narrow and wide beam options – 18° to 60°
- 35/70/150w CMI-T lamp options
- High LORs of up to 71%
- Re-lampable from above or below the ceiling
- Integral borosilicate safety glass giving IP44 protection
- Wallwasher versions offer a fixed 30° throw through a combination of tilt and refracting lens



Lumipower Gear

- Range of electronic gear for 35W, 70W and 150W high intensity discharge lamps
- Specifically for use with HIT fixtures
- Compact and thermally protected against overloading
- Electronic gear optimises lamp life, colour stability, efficiency and gives a rapid start flicker-free light




Equinox III CMI-T



CMI-T 35/70/150w G12
35w = 3300 lm
70w = 6200 lm
150w = 13500 lm

HSI-T 35/70/150w G12
35w = 2400 lm
70w = 5200 lm
150w = 12000 lm

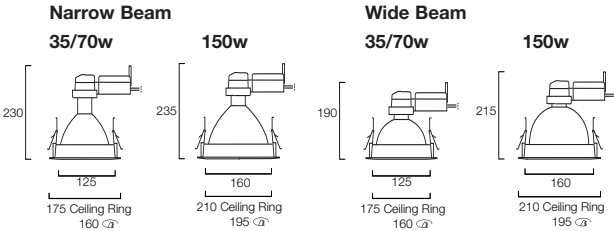

Narrow Beam Housing Only

	Beam	
35/70w CMI-T/HSI-T	19°	2031548
150w HIT-UVr/HIT-CE	23°	2031558

Wide Beam Housing Only

	Beam	
35/70w CMI-T/HSI-T	59°	2031551
150w HIT-UVr/HIT-CE	53°	2031561

Lumipower Gear


Lumipower	Order separately	L x W x H	
35w HIT Lumipower Electronic		210 x 80 x 70	3006730
35w HIT Lumipower Slim Electronic		185 x 40 x 70	3006090
70w HIT Lumipower Electronic		155 x 85 x 40	3006750
150w HIT Lumipower Electronic		185 x 85 x 40	3006770

Equinox III


- Wide beam ideal for higher ceiling applications
- Integral borosilicate safety glass giving IP44 protection
- Re-lampable from below the ceiling
- 250W HSI-TD supplied complete with electronic gear



Equinox III HSI-TD / CMI-TD



HIT-DE
250w Fc2




250w = 20000 lm

Wide Beam Complete with Gear

Beam

250w HSI-TD	63 x 103°	2031534
-------------	-----------	----------------



HIT-DE
70w RX7s
150w RX7s-24
250w Fc2



70w = 5500 lm
150w = 13000 lm
250w = 20000 lm

HIT-DE-CE
70w RX7s
150w RX7s-24



70w = 6200 lm
150w = 13500 lm

Wide Beam Housing Only

Beam

70w HSI-TD/CMI-TD	89°	2031566
150w HSI-TD/CMI-TD	89°	2031568



Lumipower Gear


Lumipower	Order separately	L x W x H	
70w HIT Lumipower Electronic		155 x 85 x 40	3006750
150w HIT Lumipower Electronic		185 x 85 x 40	3006770

Myriad 4

- Compact high output downlight with a cut out of just 76mm
- All luminaires supplied complete with lamp, electronic gear and trim
- 38° luminaire with low glare multigroove baffle
- BriteSpot™ lamp has approximately 3 times the output of a tungsten halogen equivalent
- 6,000 hours lamp life (50% more than most MR16s)
- Not suitable for use with other Myriad 4 accessories



Myriad 4 BriteSpot

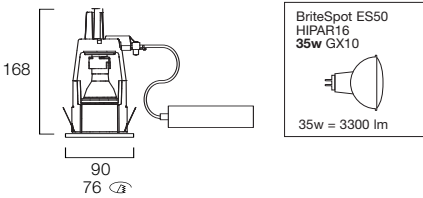

		White	Satin Chrome
35w BriteSpot ES50	38°	2034964	2034966



Myriad 4

- 115mm shallow recess version for restricted ceiling voids
- Available with or without transformer



Lumitronic Transformer

- Electronic transformer with 60VA output
- Easy to install and can be dimmed with leading & trailing edge dimmer
- Thermally protected against overloads and short circuits
- Soft start for longer lamp life



Myriad 4 Myriad 50

Mains Halogen

HID & LV


F

IP23

IP44


with accessories

850°C



CMI-TC/HIT-CE
35w G8.5

35w = 3400 lm



QT12-LPax
50w GY6.35

50w = 1000 lm

Complete Downlight

Housing, white bezel + cover glass, with or less transformer

	Beam	Silver Reflector With Transformer/Gear	Less Transformer
50w QT12-LPax	10°	2030600	2030941
50w QT12-LPax	40°	2030601	2030942

Housing Only	Beam	Silver Reflector With Transformer	Less Transformer
35w CMI-TC	40°	2029622	-
50w QT12-LPax	40°	2029625	2029627

Accessories

Order separately	White	Satin Chrome
Bezel + Cover Glass	2017359	2017358
Bezel + Opal Dish	2017375	2017374
Bezel + Floating Clear Glass	2017401	2017400

Other accessories available. Please refer to main catalogue

Lumitronic Transformer

Order separately	L x W x H
Lumitronic 20-60VA 12V	91 x 28 x 41 3006030

Myriad 4

- 115mm shallow recess version for restricted ceiling voids
- Available with or without transformer




Lumitronic Transformer


- Electronic transformer with 60VA output
- Easy to install and can be dimmed with leading & trailing edge dimmer
- Thermally protected against overloads and short circuits
- Soft start for longer lamp life



Myriad 4 Myriad 50



QT12-LPax Shallow Housing



Shallow Housing	Beam	Silver Reflector With Transformer	Less Transformer
50w QT12-LPax	10°	2029620	2030938
50w QT12-LPax	40°	2029621	2030940

Accessories

Order separately	White	Satin Chrome
Bezel + Cover Glass	2017359	2017358
Bezel + Opal Dish	2017375	2017374
Bezel + Floating Clear Glass	2017401	2017400

Other accessories available. Please refer to main catalogue

Lumitronic Transformer

Order separately	L x W x H	
Lumitronic 20-60VA 12V	91 x 28 x 41	3006030

Myriad 4

- Available with or without leading and trailing edge dimmable transformer
- Choice of beam angle through lamp selection
- Darklight baffle




Housing



White Bezel +
Black Baffle Accessory

Myriad 4 Myriad 50 Dichroic

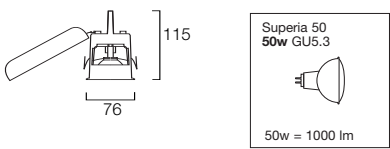

Housing	With Transformer	Less Transformer
50w Superia 50	2030620	2030944

Accessory	White	Satin Chrome
Order separately		
Bezel + Black Baffle	2017406	2017405

Lumitronic Transformer

Order separately	L x W x H	
Lumitronic 20-60VA 12V	91 x 28 x 41	3006030




Myriad 4

- Compact fluorescent low energy downlight
- Ideal for low level orientation lighting
- Choice of decorative accessories



Myriad 4 Myriad LED

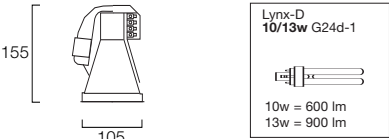

⏚ F IP23 IP44 with accessories

Housing

10/13w Lynx-D 2017410

Accessories

Order separately	White	Satin Chrome
Bezel + Cover Glass	2017419	2017418
Bezel + Opal Dish	2017436	2017435

Other accessories available. Please refer to main catalogue



Myriad 4

- Adjustable luminaire for 50w dichroic lamp
- Deep set position of lamp provides accent lighting without glare






White Globe
with White Ceiling Bezel



Black Globe
with Satin Chrome Bezel



Myriad 4 Adjustable Darklighter



Housing Only		White Bezel	Satin Chrome Bezel
50w Superia 50	White Globe	2030945	-
50w Superia 50	Black Globe	2030946	2030947

Lumitronic Transformer

Order separately	L x W x H	
Lumitronic 20-60VA 12V	91 x 28 x 41	3006030



Myriad 4 Pendants


- Surface and track mounted pendants
- 50w 12V QT12-LPax version suitable for use with either leading or trailing edge dimmers
- 50w Hi-Spot ES50 version supplied complete with 230V 25° lamp
- Accessories must be ordered separately






Matt Silver Housing




Myriad 4 Myriad 50 Pendants

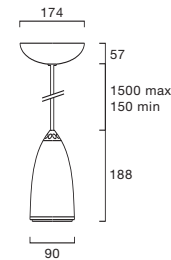

CDM-TC &
QT12-LPax

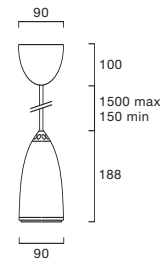

Hi-Spot ES50



Surface Mounted

Matt Silver


35w CDM-TC	2029633
50w QT12-LPax	2029641
50w Hi-Spot ES50	2029645

Accessories

Order separately	White	Satin Chrome
Bezel + Cover Glass	2017359	2017358
Bezel + Floating Clear Glass	2017401	2017400

Lytespan 3

- Ideal for suspension or surface mounting
- Track units and system components enable a scheme to be created to individual requirements
- Selection of universal suspensions
- Couplers and other components designed to follow profile of track

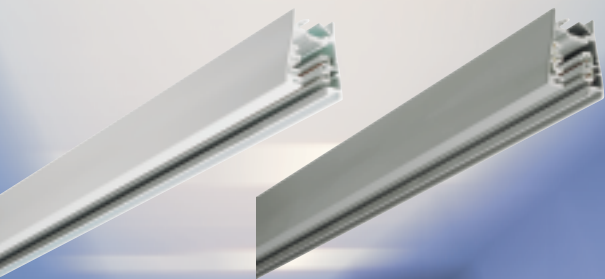

Lytespan 3 Three Circuit Track

Track Units and Components

Basic components required for a track scheme:

- Track Unit
- Live Feed: Feeds power onto track
- Coupler: Only required if creating runs
- End Cap: Safely terminates track ends
- Suspensions: Safely and securely mounts track

Standard Track Unit

- For single or continuous runs and grids
- Ideal for surface mounting or suspension
- **Order components and accessories separately**

Length	White	Silver
1m	2020760	2020761
2m	2020762	2020763
3m	2020751	2020759
4m	2020787	2020788


		White	Silver
Push-Up Live Feed	Left	2027546	2027547
	Right	2027549	2027550
Plug-In Live Feed	Universal	2020790	2021318
Straight Plug-in Coupler	Mech/Elec	2020797	2027542
	Inside	2020792	2021315
L Coupler	Outside	2020793	2021314
	Left	2020795	2021313
T Coupler	Right	2020796	2021312
	Universal	2020794	2021311
X Coupler	Mech/Elec	2020798	2021310
Flexible Coupler	Must be used to	2020789	2021317
	terminate track ends		
End Cap			

Universal Suspensions see page XX



Monopoint

- Mount track adaptors directly onto walls or ceilings
- For Concord type single circuit and three circuit adaptors
- Three circuit monopoint features knock out to allow the fitting of heavy duty adaptors

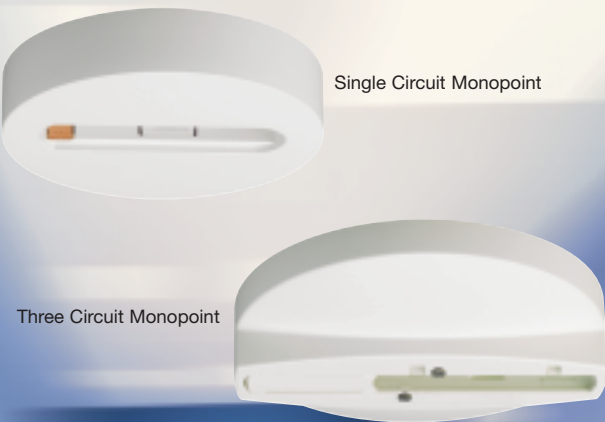


Universal Suspensions

- Rod suspensions provide rigid fixing up to 1.5m straight down from ceiling. Required for uneven loads or areas exposed to air movement
- Adjustable 3m wire suspensions provide the flexibility to fix from any angle, ideal for sloping ceilings
- Clutch adjustment mechanism allows quick and easy installation and levelling
- Mechanical and electrical easy to wire rod and wire suspensions enable discrete mains supply feed to track



Monopoint Single & Three Circuit



		White	Silver
Monopoint	Single Circuit	3020060	3020070
Monopoint	Three Circuit	3020010	3020030

Universal Suspensions

Wire Suspensions		Chrome	White
Single 3m	Mech Only	2035031	–
Single 3m Single Circuit	Elec/Mech	–	2035014
Single 3m Three Circuit	Elec/Mech	–	2035015

Rod Suspensions		White
Rod 0.50m	Mech Only	2035020
Rod 0.50m Single Circuit	Elec/Mech	2035021
Rod 0.50m Three Circuit	Elec/Mech	2035022
Rod Extension 0.50m	Mech Only	2035026

Surface Mounting		White
Mount Clip 0.14m	Elec/Mech	2011999

Max spacing for all suspensions 1.2m



Additional Suspensions available. Please refer to main catalogue

LED 100-TE

- Recess depth of 100mm
- Full depth silver reflector
- Tilting lampholder for easier re-lamping
- Die-cast housing with integral polycarbonate gear



LED 100-TE Architectural

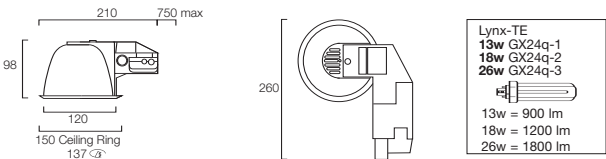


120mmØ

1 x 13w Lynx-TE	2028019
1 x 18w Lynx-TE	2028021
1 x 26w Lynx-TE	2028023

120mmØ Accessories Order separately

	White	Silver
Clear Glass IP44 Cover	2028033	2028599

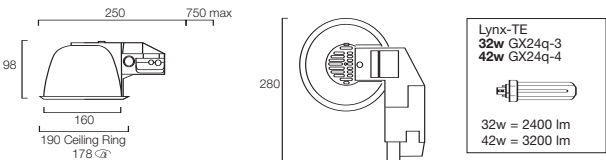

160mmØ

1 x 32/42w Lynx-TE*	2028027
---------------------	----------------

* Will also accept 26w Lynx-DE

160mmØ Accessories Order separately

	White	Silver
Clear Glass IP44 Cover	2028034	2028600

Additional Accessories available.

Please refer to main catalogue

LED 100-TE

- Recess depth of 100mm
- Tilting lampholder eases re-lamping
- Die cast aluminium housing with integral polycarbonate gear box
- ‘Snap fit’ polycarbonate accessories
- Super efficient electronic control gear



Opal Dropped Ring



IP44 Cover



Blue Dropped Ring





IP44 Opal



IP44 Prismatic

LED 100-TE Deco

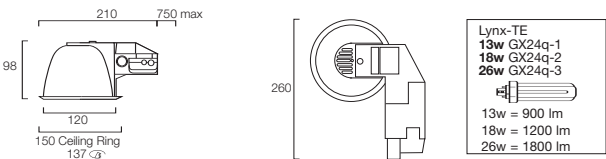


120mmØ

1 x 13w Lynx-TE	2028009
1 x 18w Lynx-TE	2028011
1 x 26w Lynx-TE	2028013

120mmØ Accessories Order separately

Opal Dropped Ring	2028047
Blue Dropped Ring	2028049
IP44 Clear	2028039
IP44 Opal	2028041
IP44 Prismatic	2028043

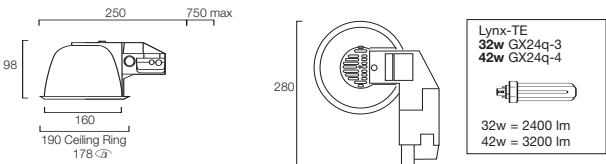

160mmØ

1 x 32/42w Lynx-TE*	2028017
---------------------	----------------

* Will also accept 26w Lynx-DE

160mmØ Accessories Order separately

Opal Dropped Ring	2028048
Blue Dropped Ring	2028050
IP44 Clear	2028040
IP44 Opal	2028042
IP44 Prismatic	2028044


Additional Accessories available.
Please refer to main catalogue

LED 100-TE

- Standard non-accessory downlight
- Recess depth of 100mm
- White reflector
- Tilting lampholder eases re-lamping
- Die-cast housing with integral polycarbonate gear box




LED 100-TE Eco

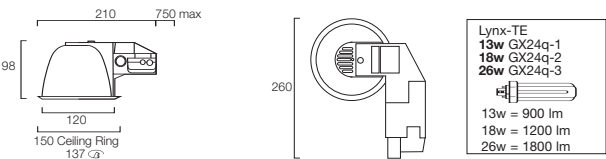

120mmØ

1 x 13w Lynx-TE	2027999
1 x 18w Lynx-TE	2028001
1 x 26w Lynx-TE	2028003

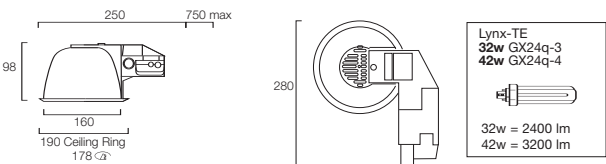

160mmØ

1 x 32/42w Lynx-TE*	2028007
---------------------	---------

* Will also accept 26w Lynx-DE

SLI Lichtsysteme GmbH

info.de@sylvania-lighting.com

www.sylvania-lighting.com

Deutschland

Sylvania / Lumiance / Concord

SLI Lichtsysteme GmbH

Graf-Zeppelin-Straße 9-12

91056 Erlangen

Telefon 09131 / 793-500

Telefax 09131 / 793-345

www.sli-deutschland.de

Österreich

Sylvania / Lumiance / Concord

SLI Lichtsysteme GmbH

Otto-Probst-Straße 22-24

A-1100 Wien

Telefon 01 / 617 44-80

Telefax 01 / 617 44-81

www.sli-austria.de

Schweiz

Sylvania Lighting S.A.

4, Chemin des Léchères

CH-1217 Meyrin

Phone (+41) 22 / 719 85 80

Telefax (+41) 22 / 719 85 81

info.ch@sylvania-lighting.com

Eastern Europe

Sylvania / Lumiance / Concord

SLI Lichtsysteme GmbH

Graf-Zeppelin-Straße 9-12

91056 Erlangen

Telefon 09131 / 793-499

Telefax 09131 / 793-407